

ALESSANDRA

ELECTRIC - POLISHED STAINLESS STEEL



Polished stainless steel

VERSION FOR DOMOTIC CONTROL WITH CABLE COVER

Class protection: CLASS 1

Minimum ingress protection: IP 55

Wire lenght: 1200 mm without plug

Power supply: 230Vac 50Hz

For the version with CABLE COVER it is necessary to connect the radiator to a home automation management system or with an external thermostat equipped with electronic temperature control, daily programming and stand-by electrical output consumption <0.5 W (or 2.0 W in Wi-Fi mode, where applicable) in order to meet the requirements of EU Regulation 2024/1103 for electrical radiators with an output between 60 and 250W. The cable is without plug and must be connected to an ON-OFF switch (not included), a power supply disconnect (not included) and a protection device (not included) must be provided. For correct installation, consult an electrician and refer to local regulations for electrical networks.

MATERIAL:

- Ø 30 mm vertical collectors in polished stainless steel.
- 30x10 mm horizontal elements in polished stainless steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years. The electric resistance and the cable are hidden by a polished stainless steel cable cover.


CERTIFICATES



ELECTRICAL ONLY


- ☒ Electric resistance for DOMOTIC control

HOW TO PLACE ELECTRIC RADIATORS




The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.

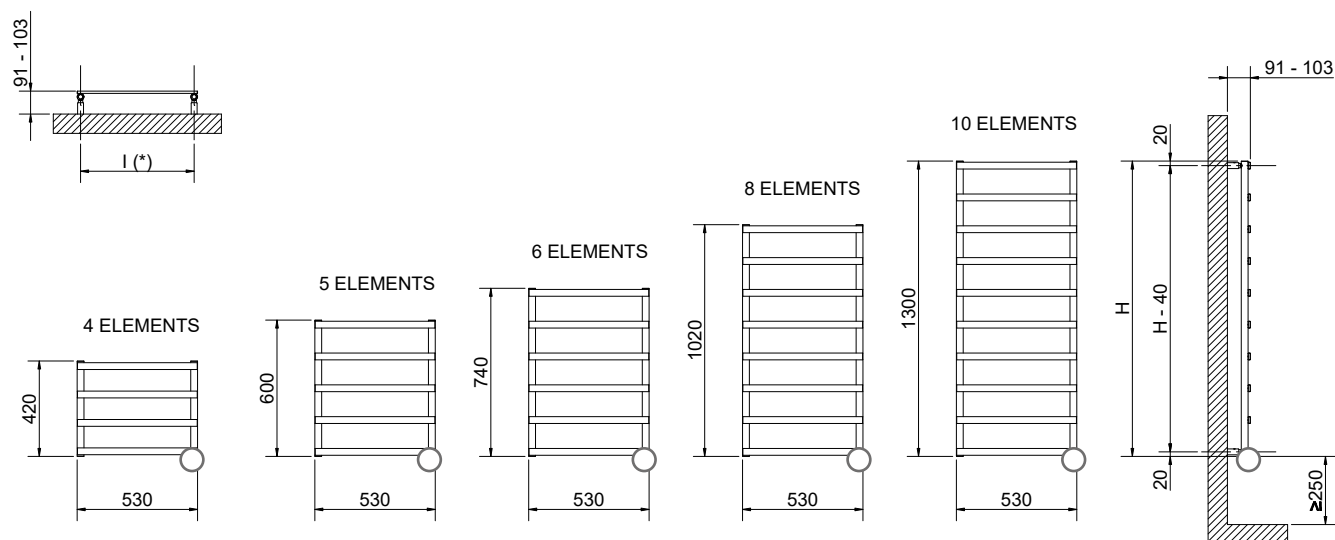

(*) The fixing kit has the same pipe centre (l) as the radiator

○ The total height has to be calculated considering the height of the cable cover



ALESSANDRA ELECTRIC FOR DOMOTIC CONTROL WITH CABLE COVER POLISHED STAINLESS STEEL

Height	Width	Fixing kit center distance		Output	Weight
[mm]	L [mm]	l [mm] (*)	Art. nr.	[Watt]	[Kg]
420	530	500	3581680400011	150	3,3
600	530	500	3581680400012	150	4,4
740	530	500	3581680400013	150	5,0
1020	530	500	3581680400014	150	5,9
1300	530	500	3581680400015	150	6,7