

ALESSANDRA

POLISHED STAINLESS STEEL

 WARRANTY 10 YEARS



MATERIAL:

- Ø 30 mm vertical collectors in polished stainless steel.
- 30x10 mm horizontal elements in polished stainless steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

CERTIFICATES



FEATURES

P. max: 8 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/2" G

AVAILABLE FUNCTIONS

☒ Hot water

☒ Electric

AVAILABLE ACCESSORIES



Kristal valve angled with thermostatic option chromed




Kristal valve corner Right or Left with thermostatic option chromed



Thermostatic head Kristal TC chromed

Complete list, codes and details of the ACCESSORIES

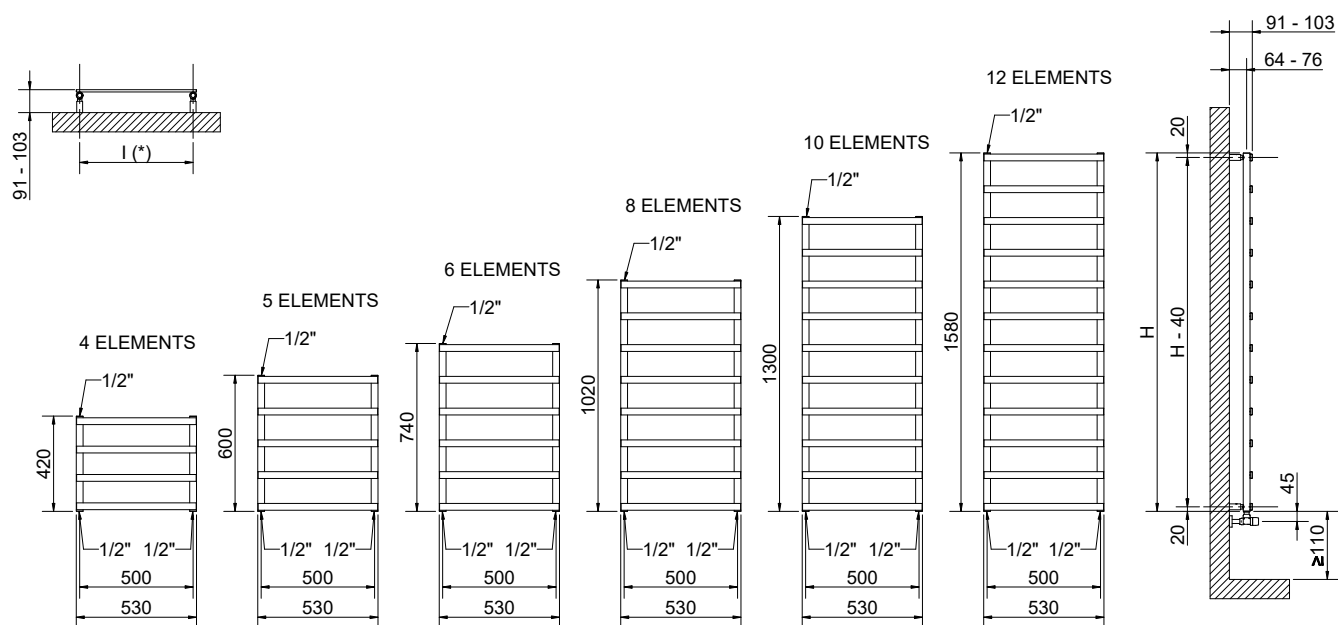

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

ALESSANDRA POLISHED STAINLESS STEEL

Height	Width	Pipe Centres	Art. nr.	Dry Weight	Surface	Water content	Thermal output		
							Δt 50°C	Δt 30°C	Exponent
[mm]	L [mm]	l [mm]		[Kg]	[m²]	[lt]	[Watt]	[Watt]	n
420	530	500	3551680400001	2,49	0,25	0,92	122	68	1,1437
600	530	500	3551680400002	3,25	0,32	1,24	152	85	1,1529
740	530	500	3551680400003	4,01	0,39	1,51	177	98	1,1601
1020	530	500	3551680400004	4,77	0,53	2,05	228	125	1,1814
1300	530	500	3551680400005	5,52	0,66	2,59	286	157	1,1804
1580	530	500	3551680400006	6,27	0,81	3,13	353	193	1,1795

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta t / 50)^n$