

ALICE 25

TANDEM VERTICAL

WARRANTY 5 YEARS




Height H [mm]	400	500	530	600	630	700	800	830	930	1000	1200
Therm. output per el. $\Delta t = 50\text{ }^{\circ}\text{C}$ [Watt]	34,7	42	44,1	49	51,1	55,9	62,7	64,7	71,4	76	89,2
Therm. output per el. $\Delta t = 30\text{ }^{\circ}\text{C}$ [Watt]	18,2	21,9	23	25,6	26,7	29,2	32,7	33,7	37,1	39,5	46,2
Dry Weight per element [kg]	0,537	0,656	0,691	0,774	0,810	0,892	1,011	1,047	1,165	1,248	1,485
Water content [lt]	0,377	0,460	0,485	0,543	0,568	0,626	0,709	0,734	0,817	0,875	1,041
Element surface [m ²]	0,070	0,086	0,090	0,101	0,106	0,117	0,133	0,137	0,153	0,164	0,195
Exponent n	1,2668	1,2691	1,2698	1,2714	1,2721	1,2737	1,2760	1,2767	1,2790	1,2807	1,2878
Pipe Centres I [mm] (V3-V4 only)	370	470	500	570	600	670	770	800	900	970	1170

For output at different ΔT , please refer to the following formula: **desired output = output at $\Delta T 50 \times$ (Desired $\Delta T/50$)ⁿ**

Height H [mm]	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2500
Therm. output per el. $\Delta t = 50\text{ }^{\circ}\text{C}$ [Watt]	102,1	108,6	115	121,4	127,8	134,2	140,6	146,9	153,3	159,7	172,5
Therm. output per el. $\Delta t = 30\text{ }^{\circ}\text{C}$ [Watt]	52,7	55,9	59,1	62,4	65,6	68,8	72	75,2	78,4	82,5	88,7
Dry Weight per element [kg]	1,722	1,840	1,959	2,077	2,196	2,314	2,433	2,551	2,670	2,788	3,025
Water content [lt]	1,208	1,291	1,374	1,457	1,540	1,623	1,706	1,789	1,872	1,955	2,122
Element surface [m ²]	0,227	0,243	0,258	0,274	0,290	0,305	0,321	0,337	0,353	0,368	0,400
Exponent n	1,2949	1,2984	1,3020	1,3036	1,3052	1,3069	1,3085	1,3102	1,3118	1,3134	1,3151
Pipe Centres I [mm] (V3-V4 only)	1370	1470	1570	1670	1770	1870	1970	2070	2170	2270	2470

AVAILABLE ACCESSORIES

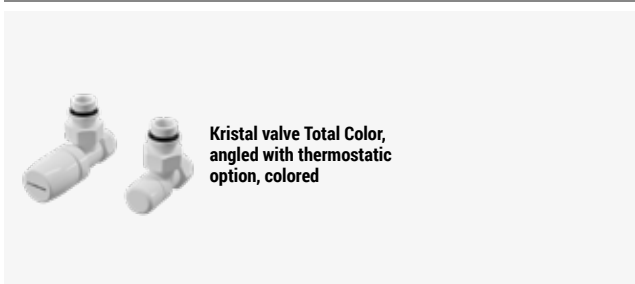

Complete list, codes and details of the ACCESSORIES

CORDIVARI

MATERIAL:

- Ø 30 mm horizontal collectors in painted mild steel.
- Ø 25 mm double vertical heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).


COLORS:

See color chart.


CERTIFICATES




STANDARD CONNECTIONS

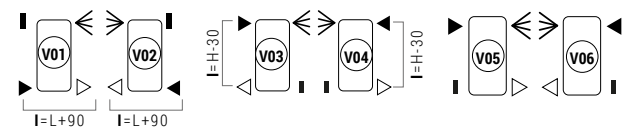


SPECIAL CONNECTIONS

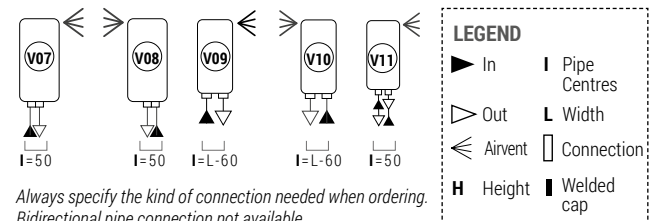

Always specify the kind of connection needed when ordering.
Bidirectional pipe connection not available.

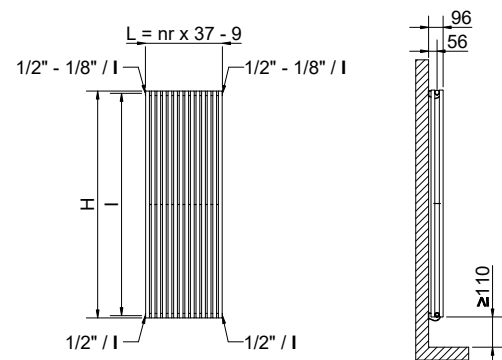

Quotes for Kristal valves

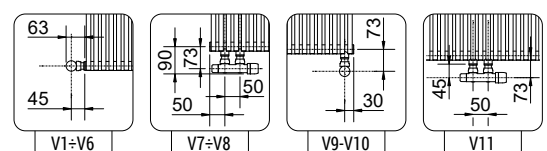

FEATURES

P. max: 8 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/8" G

Replacement heights are marked in grey color.

Height H [mm]		400	500	530	600	630	700	800	830	930	1000	1200
Width L [mm]	N° El.	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C
176	5	174	210	221	245	256	280	314	324	357	380	446
213	6	208	252	265	294	307	335	376	388	428	456	535
250	7	243	294	309	343	358	391	439	453	500	532	624
287	8	278	336	353	392	409	447	502	518	571	608	714
324	9	312	378	397	441	460	503	564	582	643	684	803
361	10	347	420	441	490	511	559	627	647	714	760	892
398	11	382	462	485	539	562	615	690	712	785	836	981
435	12	416	504	529	588	613	671	752	776	857	912	1070
472	13	451	546	573	637	664	727	815	841	928	988	1160
509	14	486	588	617	686	715	783	878	906	1000	1064	1249
546	15	521	630	662	735	767	839	941	971	1071	1140	1338
583	16	555	672	706	784	818	894	1003	1035	1142	1216	1427
620	17	590	714	750	833	869	950	1066	1100	1214	1292	1516
657	18	625	756	794	882	920	1006	1129	1165	1285	1368	1606
694	19	659	798	838	931	971	1062	1191	1229	1357	1444	1695
731	20	694	840	882	980	1022	1118	1254	1294	1428	1520	1784
768	21	729	882	926	1029	1073	1174	1317	1359	1499	1596	1873
805	22	763	924	970	1078	1124	1230	1379	1423	1571	1672	1962
842	23	798	966	1014	1127	1175	1286	1442	1488	1642	1748	2052
879	24	833	1008	1058	1176	1226	1342	1505	1553	1714	1824	2141
916	25	868	1050	1103	1225	1278	1398	1568	1618	1785	1900	2230
953	26	902	1092	1147	1274	1329	1453	1630	1682	1856	1976	2319
990	27	937	1134	1191	1323	1380	1509	1693	1747	1928	2052	2408
1027	28	972	1176	1235	1372	1431	1565	1756	1812	1999	2128	2498
1064	29	1006	1218	1279	1421	1482	1621	1818	1876	2071	2204	2587
1101	30	1041	1260	1323	1470	1533	1677	1881	1941	2142	2280	2676
1138	31	1076	1302	1367	1519	1584	1733	1944	2006	2213	2356	2765
1175	32	1110	1344	1411	1568	1635	1789	2006	2070	2285	2432	2854
1212	33	1145	1386	1455	1617	1686	1845	2069	2135	2356	2508	2944
1249	34	1180	1428	1499	1666	1737	1901	2132	2200	2428	2584	3033
1286	35	1215	1470	1544	1715	1789	1957	2195	2265	2499	2660	3122
1323	36	1249	1512	1588	1764	1840	2012	2257	2329	2570	2736	3211
1360	37	1284	1554	1632	1813	1891	2068	2320	2394	2642	2812	3300
1397	38	1319	1596	1676	1862	1942	2124	2383	2459	2713	2888	3390
1434	39	1353	1638	1720	1911	1993	2180	2445	2523	2785	2964	3479
1471	40	1388	1680	1764	1960	2044	2236	2508	2588	2856	3040	3568
1508	41	1423	1722	1808	2009	2095	2292	2571	2653	2927	3116	3657
1545	42	1457	1764	1852	2058	2146	2348	2633	2717	2999	3192	3746

Height H [mm]		1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2500
Width L [mm]	N° El.	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C	Watt Δt 50°C
176	5	511	543	575	607	639	671	703	735	767	799	863
213	6	613	652	690	728	767	805	844	881	920	958	1035
250	7	715	760	805	850	895	939	984	1028	1073	1118	1208
287	8	817	869	920	971	1022	1074	1125	1175	1226	1278	1380
324	9	919	977	1035	1093	1150	1208	1265	1322	1380	1437	1553
361	10	1021	1086	1150	1214	1278	1342	1406	1469	1533	1597	1725
398	11	1123	1195	1265	1335	1406	1476	1547	1616	1686	1757	1898
435	12	1225	1303	1380	1457	1534	1610	1687	1763	1840	1916	2070
472	13	1327	1412	1495	1578	1661	1745	1828	1910	1993	2076	2243
509	14	1429	1520	1610	1700	1789	1879	1968	2057	2146	2236	2415
546	15	1532	1629	1725	1821	1917	2013	2109	2204	2300	2396	2588
583	16	1634	1738	1840	1942	2045	2147	2250	2350	2453	2555	2760
620	17	1736	1846	1955	2064	2173	2281	2390	2497	2606	2715	2933
657	18	1838	1955	2070	2185	2300	2416	2531	2644	2759	2875	3105
694	19	1940	2063	2185	2307	2428	2550	2671	2791	2913	3034	3278
731	20	2042	2172	2300	2428	2556	2684	2812	2938	3066	3194	3450
768	21	2144	2281	2415	2549	2684	2818	2953	3085	3219	3354	3623
805	22	2246	2389	2530	2671	2812	2952	3093	3232	3373	3513	3795
842	23	2348	2498	2645	2792	2939	3087	3234	3379	3526	3673	3968
879	24	2450	2606	2760	2914	3067	3221	3374	3526	3679	3833	4140
916	25	2553	2715	2875	3035	3195	3355	3515	3673	3833	3993	4313
953	26	2655	2824	2990	3156	3323	3489	3656	3819	3986	4152	4485
990	27	2757	2932	3105	3278	3451	3623	3796	3966	4139	4312	4658
1027	28	2859	3041	3220	3399	3578	3758	3937	4113	4292	4472	4830
1064	29	2961	3149	3335	3521	3706	3892	4077	4260	4446	4631	5003
1101	30	3063	3258	3450	3642	3834	4026	4218	4407	4599	4791	5175
1138	31	3165	3367	3565	3763	3962	4160	4359	4554	4752	4951	5348
1175	32	3267	3475	3680	3885	4090	4294	4499	4701	4906	5110	5520
1212	33	3369	3584	3795	4006	4217	4429	4640	4848	5059	5270	5693
1249	34	3471	3692	3910	4128	4345	4563	4780	4995	5212	5430	5865
1286	35	3574	3801	4025	4249	4473	4697	4921	5142	5366	5590	6038
1323	36	3676	3910	4140	4370	4601	4831	5062	5288	5519	5749	6210
1360	37	3778	4018	4255	4492	4729	4965	5202	5435	5672	5909	6383
1397	38	3880	4127	4370	4613	4856	5100	5343	5582	5825	6069	6555
1434	39	3982	4235	4485	4735	4984	5234	5483	5729	5979	6228	6728
1471	40	4084	4344	4600	4856	5112	5368	5624	5876	6132	6388	6900
1508	41	4186	4453	4715	4977	5240	5502	5765	6023	6285	6548	7073
1545	42	4288	4561	4830	5099	5368	5636	5905	6170	6439	6707	7245

ALICE 25

TANDEM VERTICAL

El.	Width	Dry Weight	Thermal output			Art. nr.
			Δt	Δt	Δt	
			50°C	40°C	30°C	
n°	L [mm]	[Kg]	[Watt]			
H 500 mm						
14	509	9,2	588	443	307	AT25 14 050 V __ A
16	583	10,5	672	506	351	AT25 16 050 V __ A
18	657	11,8	756	570	395	AT25 18 050 V __ A
20	731	13,1	840	633	439	AT25 20 050 V __ A
22	805	14,4	924	696	483	AT25 22 050 V __ A
24	879	15,7	1008	759	527	AT25 24 050 V __ A
26	953	17,1	1092	823	571	AT25 26 050 V __ A
28	1027	18,4	1176	886	615	AT25 28 050 V __ A
30	1101	19,7	1260	949	659	AT25 30 050 V __ A
32	1175	21,0	1344	1013	703	AT25 32 050 V __ A
34	1249	22,3	1428	1076	747	AT25 34 050 V __ A
36	1323	23,6	1512	1139	791	AT25 36 050 V __ A
38	1397	24,9	1596	1202	835	AT25 38 050 V __ A
40	1471	26,2	1680	1266	879	AT25 40 050 V __ A

El.	Width	Dry Weight	Thermal output			Art. nr.
			Δt	Δt	Δt	
			50°C	40°C	30°C	
n°	L [mm]	[Kg]	[Watt]			
H 600 mm						
14	509	10,8	686	517	358	AT25 14 060 V __ A
16	583	12,4	784	590	410	AT25 16 060 V __ A
18	657	13,9	882	664	461	AT25 18 060 V __ A
20	731	15,5	980	738	512	AT25 20 060 V __ A
22	805	17,0	1078	812	563	AT25 22 060 V __ A
24	879	18,6	1176	886	614	AT25 24 060 V __ A
26	953	20,1	1274	959	665	AT25 26 060 V __ A
28	1027	21,7	1372	1033	717	AT25 28 060 V __ A
30	1101	23,2	1470	1107	768	AT25 30 060 V __ A
32	1175	24,8	1568	1181	819	AT25 32 060 V __ A
34	1249	26,3	1666	1254	870	AT25 34 060 V __ A
36	1323	27,9	1764	1328	921	AT25 36 060 V __ A
38	1397	29,4	1862	1402	973	AT25 38 060 V __ A
40	1471	31,0	1960	1476	1024	AT25 40 060 V __ A

H 700 mm						
14	509	12,5	783	589	408	AT25 14 070 V __ A
16	583	14,3	894	673	467	AT25 16 070 V __ A
18	657	16,1	1006	757	525	AT25 18 070 V __ A
20	731	17,8	1118	841	583	AT25 20 070 V __ A
22	805	19,6	1230	926	642	AT25 22 070 V __ A
24	879	21,4	1342	1010	700	AT25 24 070 V __ A
26	953	23,2	1453	1094	758	AT25 26 070 V __ A
28	1027	25,0	1565	1178	817	AT25 28 070 V __ A
30	1101	26,8	1677	1262	875	AT25 30 070 V __ A
32	1175	28,5	1789	1346	933	AT25 32 070 V __ A
34	1249	30,3	1901	1430	992	AT25 34 070 V __ A
36	1323	32,1	2012	1515	1050	AT25 36 070 V __ A
38	1397	33,9	2124	1599	1108	AT25 38 070 V __ A
40	1471	35,7	2236	1683	1167	AT25 40 070 V __ A

H 800 mm						
14	509	14,2	878	660	457	AT25 14 080 V __ A
16	583	16,2	1003	755	523	AT25 16 080 V __ A
18	657	18,2	1129	849	588	AT25 18 080 V __ A
20	731	20,2	1254	943	653	AT25 20 080 V __ A
22	805	22,2	1379	1038	719	AT25 22 080 V __ A
24	879	24,3	1505	1132	784	AT25 24 080 V __ A
26	953	26,3	1630	1226	849	AT25 26 080 V __ A
28	1027	28,3	1756	1321	915	AT25 28 080 V __ A
30	1101	30,3	1881	1415	980	AT25 30 080 V __ A
32	1175	32,4	2006	1509	1046	AT25 32 080 V __ A
34	1249	34,4	2132	1604	1111	AT25 34 080 V __ A
36	1323	36,4	2257	1698	1176	AT25 36 080 V __ A
38	1397	38,4	2383	1792	1242	AT25 38 080 V __ A
40	1471	40,4	2508	1887	1307	AT25 40 080 V __ A

H 1000 mm						
14	509	17,5	1064	800	553	AT25 14 100 V __ A
16	583	20,0	1216	914	632	AT25 16 100 V __ A
17	620	21,2	1292	971	672	AT25 17 100 V __ A
18	657	22,5	1368	1028	711	AT25 18 100 V __ A
19	694	23,7	1444	1085	751	AT25 19 100 V __ A
20	731	25,0	1520	1142	790	AT25 20 100 V __ A
22	805	27,5	1672	1256	869	AT25 22 100 V __ A
23	842	28,7	1748	1313	909	AT25 23 100 V __ A
24	879	30,0	1824	1371	948	AT25 24 100 V __ A
25	916	31,2	1900	1428	988	AT25 25 100 V __ A
26	953	32,4	1976	1485	1027	AT25 26 100 V __ A
27	990	33,7	2052	1542	1067	AT25 27 100 V __ A
28	1027	34,9	2128	1599	1106	AT25 28 100 V __ A
30	1101	37,4	2280	1713	1185	AT25 30 100 V __ A

H 1200 mm						
14	509	20,8	1249	937	647	AT25 14 120 V __ A
16	583	23,8	1427	1071	739	AT25 16 120 V __ A
17	620	25,2	1516	1138	785	AT25 17 120 V __ A
18	657	26,7	1606	1205	832	AT25 18 120 V __ A
19	694	28,2	1695	1272	878	AT25 19 120 V __ A
20	731	29,7	1784	1338	924	AT25 20 120 V __ A
22	805	32,7	1962	1472	1016	AT25 22 120 V __ A
23	842	34,2	2052	1539	1063	AT25 23 120 V __ A
24	879	35,6	2141	1606	1109	AT25 24 120 V __ A
25	916	37,1	2230	1673	1155	AT25 25 120 V __ A
26	953	38,6	2319	1740	1201	AT25 26 120 V __ A
27	990	40,1	2408	1807	1247	AT25 27 120 V __ A
28	1027	41,6	2498	1874	1294	AT25 28 120 V __ A
30	1101	44,6	2676	2008	1386	AT25 30 120 V __ A

ALICE 25

TANDEM VERTICAL

El.	Width	Dry Weight	Thermal output			Art. nr.
			Δt 50°C	Δt 40°C	Δt 30°C	
			[Watt]			
n°	L [mm]	[Kg]				
H 1400 mm						
8	287	13,8	817	612	422	AT25 08 140 V ___ A
10	361	17,2	1.021	765	527	AT25 10 140 V ___ A
12	435	20,7	1.225	918	632	AT25 12 140 V ___ A
13	472	22,4	1.327	994	685	AT25 13 140 V ___ A
14	509	24,1	1.429	1071	738	AT25 14 140 V ___ A
15	546	25,8	1.532	1147	790	AT25 15 140 V ___ A
16	583	27,6	1.634	1224	843	AT25 16 140 V ___ A
18	657	31,0	1.838	1377	948	AT25 18 140 V ___ A
20	731	34,4	2.042	1530	1054	AT25 20 140 V ___ A
22	805	37,9	2.246	1683	1159	AT25 22 140 V ___ A
24	879	41,3	2.450	1835	1265	AT25 24 140 V ___ A
26	953	44,8	2.655	1988	1370	AT25 26 140 V ___ A
28	1027	48,2	2.859	2141	1475	AT25 28 140 V ___ A
30	1101	51,7	3.063	2294	1581	AT25 30 140 V ___ A

H 1600 mm						
8	287	15,7	920	688	473	AT25 08 160 V ___ A
10	361	19,6	1150	860	591	AT25 10 160 V ___ A
12	435	23,5	1380	1032	710	AT25 12 160 V ___ A
14	509	27,4	1610	1204	828	AT25 14 160 V ___ A
15	546	29,4	1725	1290	887	AT25 15 160 V ___ A
16	583	31,3	1840	1376	946	AT25 16 160 V ___ A
17	620	33,3	1955	1462	1005	AT25 17 160 V ___ A
18	657	35,3	2070	1548	1064	AT25 18 160 V ___ A
19	694	37,2	2185	1634	1124	AT25 19 160 V ___ A
20	731	39,2	2300	1720	1183	AT25 20 160 V ___ A
21	768	41,1	2415	1806	1242	AT25 21 160 V ___ A
22	805	43,1	2530	1892	1301	AT25 22 160 V ___ A
23	842	45,1	2645	1978	1360	AT25 23 160 V ___ A
24	879	47,0	2760	2064	1419	AT25 24 160 V ___ A
25	916	49,0	2875	2150	1478	AT25 25 160 V ___ A
26	953	50,9	2990	2236	1538	AT25 26 160 V ___ A
27	990	52,9	3105	2322	1597	AT25 27 160 V ___ A
28	1027	54,9	3220	2408	1656	AT25 28 160 V ___ A
29	1064	56,8	3335	2494	1715	AT25 29 160 V ___ A
30	1101	58,8	3450	2580	1774	AT25 30 160 V ___ A

H 2000 mm						
6	213	14,6	844	630	432	AT25 06 200 V ___ A
8	287	19,5	1125	840	576	AT25 08 200 V ___ A
10	361	24,3	1406	1050	721	AT25 10 200 V ___ A
12	435	29,2	1687	1260	865	AT25 12 200 V ___ A
14	509	34,1	1968	1470	1009	AT25 14 200 V ___ A
15	546	36,5	2109	1575	1081	AT25 15 200 V ___ A
16	583	38,9	2250	1680	1153	AT25 16 200 V ___ A
17	620	41,4	2390	1785	1225	AT25 17 200 V ___ A
18	657	43,8	2531	1890	1297	AT25 18 200 V ___ A
19	694	46,2	2671	1995	1369	AT25 19 200 V ___ A
20	731	48,7	2812	2100	1441	AT25 20 200 V ___ A
22	805	53,5	3093	2310	1585	AT25 22 200 V ___ A
24	879	58,4	3374	2520	1729	AT25 24 200 V ___ A
26	953	63,3	3656	2730	1874	AT25 26 200 V ___ A

HOW TO ORDER THE ALICE 25 TANDEM VERTICAL RADIATOR

Radiator model E.g. Alice 25 tandem VERTICAL	Nr of Elements E.g. 24 Elements	Height in mm Example: 800 mm	Connection code Example: connection V08	Color code Es: R01 - White	Constant value
AT25	24	080	V08	R01	A

Example of article code creation

AT25 ALICE 25 TANDEM VERTICAL
24 24 Elements
080 Height 800 mm
V08 Connection V08 (see product page)
R01 Color R01 - White (see color chart)
A Constant value

The article code will be:

AT25 24 080 V08 R01 A

El.	Width n° L [mm]	Dry Weight [Kg]	Thermal output			Art. nr.
			Δt 50°C	Δt 40°C	Δt 30°C	
			[Watt]			
H 1500 mm						
8	287	14,7	869	650	448	AT25 08 150 V __ A
10	361	18,4	1086	813	559	AT25 10 150 V __ A
12	435	22,1	1303	975	671	AT25 12 150 V __ A
13	472	23,9	1412	1057	727	AT25 13 150 V __ A
14	509	25,8	1520	1138	783	AT25 14 150 V __ A
15	546	27,6	1629	1219	839	AT25 15 150 V __ A
16	583	29,4	1738	1301	895	AT25 16 150 V __ A
18	657	33,1	1955	1463	1007	AT25 18 150 V __ A
20	731	36,8	2172	1626	1119	AT25 20 150 V __ A
22	805	40,5	2389	1788	1231	AT25 22 150 V __ A
24	879	44,2	2606	1951	1343	AT25 24 150 V __ A
26	953	47,8	2824	2113	1455	AT25 26 150 V __ A
28	1027	51,5	3041	2276	1567	AT25 28 150 V __ A
30	1101	55,2	3258	2439	1678	AT25 30 150 V __ A

H 1800 mm						
8	287	17,6	1022	764	525	AT25 08 180 V ___ A
10	361	22,0	1278	955	656	AT25 10 180 V ___ A
12	435	26,4	1534	1146	787	AT25 12 180 V ___ A
14	509	30,7	1789	1337	919	AT25 14 180 V ___ A
15	546	32,9	1917	1433	984	AT25 15 180 V ___ A
16	583	35,1	2045	1528	1050	AT25 16 180 V ___ A
17	620	37,3	2173	1624	1115	AT25 17 180 V ___ A
18	657	39,5	2300	1719	1181	AT25 18 180 V ___ A
19	694	41,7	2428	1815	1247	AT25 19 180 V ___ A
20	731	43,9	2556	1910	1312	AT25 20 180 V ___ A
21	768	46,1	2684	2006	1378	AT25 21 180 V ___ A
22	805	48,3	2812	2101	1443	AT25 22 180 V ___ A
23	842	50,5	2939	2197	1509	AT25 23 180 V ___ A
24	879	52,7	3067	2292	1575	AT25 24 180 V ___ A
25	916	54,9	3195	2388	1640	AT25 25 180 V ___ A
26	953	57,1	3323	2483	1706	AT25 26 180 V ___ A
27	990	59,3	3451	2579	1771	AT25 27 180 V ___ A
28	1027	61,5	3578	2674	1837	AT25 28 180 V ___ A
29	1064	63,7	3706	2770	1903	AT25 29 180 V ___ A
30	1101	65,9	3834	2865	1968	AT25 30 180 V ___ A

H 2500 mm						
6	213	18,2	1035	772	529	AT25 06 250 V ___ A
8	287	24,2	1380	1029	705	AT25 08 250 V ___ A
10	361	30,3	1725	1286	881	AT25 10 250 V ___ A
12	435	36,3	2070	1544	1057	AT25 12 250 V ___ A
14	509	42,4	2415	1801	1234	AT25 14 250 V ___ A
15	546	45,4	2588	1929	1322	AT25 15 250 V ___ A
16	583	48,4	2760	2058	1410	AT25 16 250 V ___ A
17	620	51,4	2933	2187	1498	AT25 17 250 V ___ A
18	657	54,5	3105	2315	1586	AT25 18 250 V ___ A
19	694	57,5	3278	2444	1674	AT25 19 250 V ___ A
20	731	60,5	3450	2573	1762	AT25 20 250 V ___ A
22	805	66,6	3795	2830	1938	AT25 22 250 V ___ A
24	879	72,6	4140	3087	2115	AT25 24 250 V ___ A
26	953	78,7	4485	3344	2291	AT25 26 250 V ___ A

ARDESIA®

TOWEL RAILS

ELECTRIC & BLOWER

STAINLESS STEEL

LIVING

ACCESSORIES
TECHNICAL SUPPORT