



Color: S03 Pergamon

MATERIAL:

- Moulded heads in mild steel.
- Ø 25 mm electro-welded mild steel tubes.
- Space rings between sections welded with robotized technology of pulsed spray welding.

PACKAGING:

The radiator is protected by a recycled film in polyethylene and with a box in recycled cardboard. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1;-2).

COLORS:


See color chart.

FUNCTIONING	MAXIMUM TEMPERATURE	MINIMUM FLOW IN % OF THE NOMINAL FLOW RATE
Hot water	110 °C	18
MAXIMUM WORKING PRESSURE		TESTING CONDITIONS
10 bar		13 bar
HUB		SECTION WIDTH
1"		65 mm
CERTIFICATES		



HOW TO ORDER ARDESIA® HYGIENIC

EXAMPLE OF CODE COMPOSITION

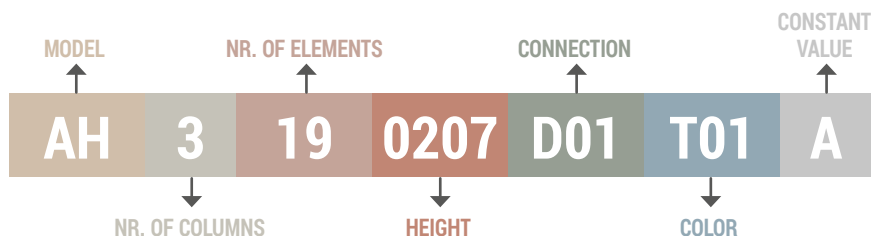

EXAMPLE OF ARTICLE CODE


AH 3 19 0207 D01 T01 A

Ardesia® Hygienic 3 columns
19 el. - H 207

- Connection D01

- Color T01

Fixing kit to be ordered separately.



TECHNICAL DATA PER SECTION (at least 3 elements) COLOR R01 WHITE					
	2 COLUMNS	3 COLUMNS	4 COLUMNS	5 COLUMNS	6 COLUMNS
Height [mm]					
207					
300					
400					
500					
600					
750					
900					
1000					
1200					
1500					
1800					
2000					
2200					
2500					

On demand, it is possible to realize ardesia in hygienic version, with all connections, heights, dimensions and finishing.

This execution extends the water content of Ardesia® to be applied also to sanitary and community centers subject to severe norms for hygiene in heating systems.

The space between the sections has been conceived to facilitate an accurate cleaning on all radiator surface. For additional information feel free to contact our sales department.