

GLORIA 22 PLUS

WARRANTY 5 YEARS



Color: S07 Grafite

FEATURES

P. max: 8 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/2" G

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- Ø 22 mm double horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart.

CERTIFICATES



AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Dual energy

AVAILABLE ACCESSORIES



Kristal valve Total Color, angled with thermostatic option, colored




Total Color, Kristal valve, angled pipe centres 50 mm Right or Left with thermostatic option, colored









Thermostatic head Kristal TC fully colored

Complete list, codes and details of the ACCESSORIES



Detail of the 50 mm pipe-centres version.

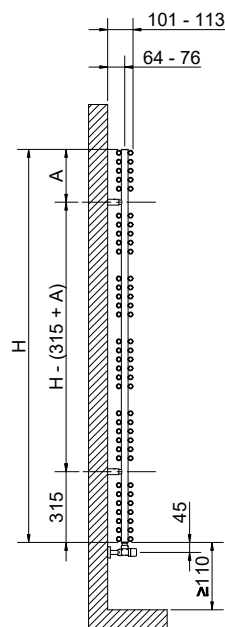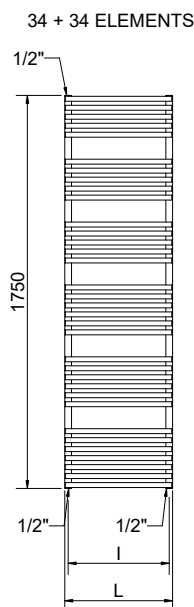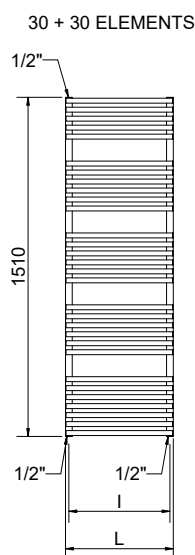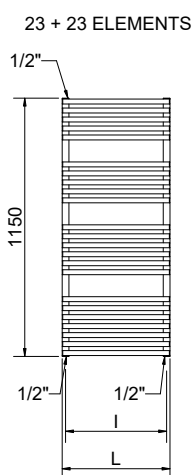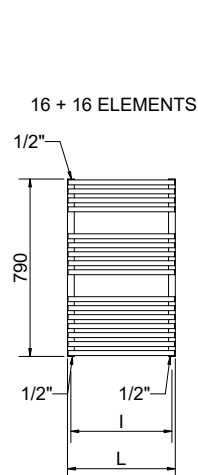

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

GLORIA 22 PLUS

					PIPE CENTRES 50 mm		Thermal output					
Height	Width	Pipe Centres	A	Art. nr.	Art. nr.	Dry Weight	Surface	Water content	Δt 50°C	Δt 30°C	Exp.	Dual energy kit
[mm]	L [mm]	l [mm]	[mm]	R01 White	R01 White	[Kg]	[m²]	[lt]	[Watt]	[Watt]	n	[Watt]
790	430	400	195	3551666100201	3551666100221	8,48	1,10	5,26	527	287	1,1925	600
	480	450		3551666100202	3551666100222	9,30	1,21	5,77	591	321	1,1925	700
1150	430	400	235	3551666100203	3551666100223	12,21	1,58	7,59	735	396	1,2129	900
	480	450		3551666100204	3551666100224	13,40	1,74	8,31	824	444	1,2121	900
	530	500		3551666100205	3551666100225	14,59	1,90	9,03	913	492	1,2114	900
	580	550		3551666100206	3551666100226	15,79	2,06	9,75	1002	540	1,2106	1200
	630	600		3551666100207	3551666100227	16,98	2,22	10,48	1091	588	1,2099	1200
1510	430	400	235	3551666100208	3551666100228	15,94	2,07	9,91	955	510	1,2272	900
	480	450		3551666100209	3551666100229	17,50	2,27	10,85	1072	574	1,2219	1200
	530	500		3551666100210	3551666100230	19,05	2,48	11,79	1186	637	1,2166	1200
	580	550		3551666100211	3551666100231	20,61	2,69	12,74	1302	701	1,2114	1200
1750	630	600	235	3551666100212	3551666100232	22,16	2,90	13,68	1417	765	1,2061	1200
	480	450		3551666100213	3551666100233	19,90	2,59	12,34	1245	665	1,2284	1200
	530	500		3551666100214	3551666100234	21,66	2,82	13,41	1379	739	1,2201	1200
	580	550		3551666100215	3551666100235	23,42	3,06	14,48	1514	815	1,2119	1200
	630	600		3551666100216	3551666100236	25,19	3,29	15,55	1649	892	1,2036	1200
	730	700		3551666100217	3551666100237	28,71	3,76	17,69	1918	1046	1,1870	1200

The codes shown in the table refer to the R01 White color models

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$