

GLORIA 22 WIDE

 WARRANTY 5 YEARS



Color: RAL 9005 - R13 Nero

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- Ø 22 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart.

CERTIFICATES



FEATURES

P. max: 8 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/2" G

AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Dual energy

AVAILABLE ACCESSORIES



Kristal valve Total Color, angled with thermostatic option, colored




Thermostatic head Kristal TC fully colored




Thermostatic head Kristal TC chromed



Complete list, codes and details of the ACCESSORIES

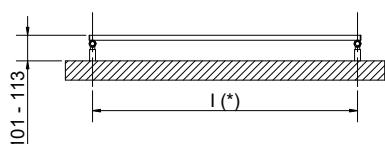

8 ELEMENTS



13 ELEMENTS

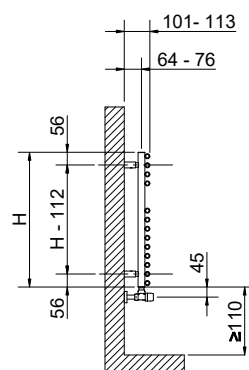

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

GLORIA 22 WIDE

Height	Width	Pipe Centres	Art. nr.	Dry Weight	Surface	Water content	Thermal output			
							Δt 50°C	Δt 30°C	Exp.	Dual energy kit
[mm]	L [mm]	I [mm]	R01 White	[kg]	[m ²]	[lt]	[Watt]	[Watt]	n	[Watt]
395	1200	1170	3551666100001	6,7	0,73	3,5	488	268	1,1717	400
	1400	1370	3551666100003	7,7	0,85	3,8	565	308	1,1860	400
595	1200	1170	3551666100002	10,8	1,9	5,3	788	425	1,2070	700
	1400	1370	3551666100004	12,4	1,37	6,2	911	495	1,1954	700

The codes shown in the table refer to the R01 White color models

For output at different ΔT , please refer to the following formula: **desired output = output at ΔT 50 x (Desired Δt /50)ⁿ**