JACKY

PATENTED

5 YEARS WARRANTY

MATERIAL:
Vertical collector in painted mild steel 90x30 mm.
Horizontal heating elements in painted mild steel 50x20 mm.

FIXING KIT:
Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:
The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:
Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLORS:
Radiators and accessories: standard white R01 color.
For other colors see color chart.

PRODUCT CERTIFICATES

P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2”- n° 2 x G 1/2”

REVERSIBLE



ACCESSORIES

Elegant square manual valve kit painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552

Elegant square with thermostatic head valve kit, painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310539

Multilayer connection Ø 16 x2
Art. Nr. 5991990310538

Pipe covering kit for Pipe Centres 50 mm polished valves

Art. Nr. 5103000000057

Tinta valve pipe centres 50 mm with thermostatic head - right - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311243

Multilayer connection Ø 16 x2
Art. Nr. 5991990311242

Tinta valve pipe centres 50 mm with thermostatic head left - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311245

Multilayer connection Ø 16 x2
Art. Nr. 5991990311244

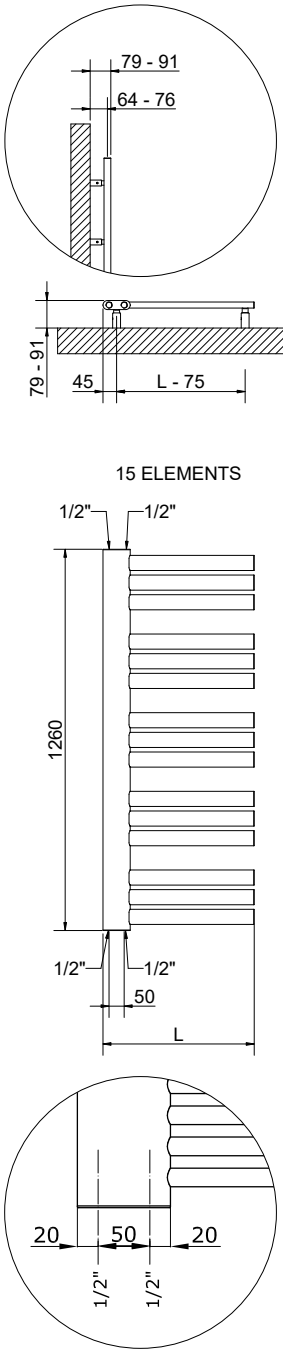

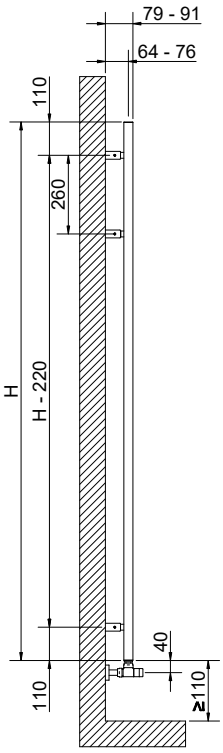

SIDE VIEW
RIGHT VERSION

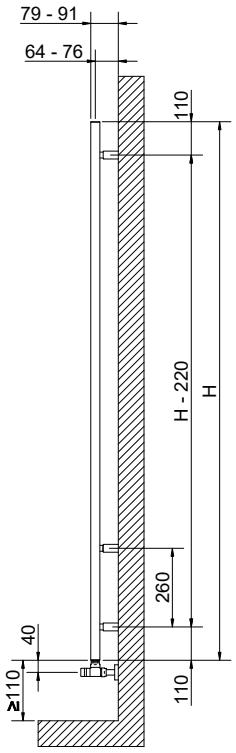

SIDE VIEW
LEFT VERSION

JACKY

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	I [mm]	[Kg]	[m²]	[lt]	**Δt = 50°C**	Δt = 30°C	
3551776101001	**1260**	500	50	14,4	1,1	7,8	566	306	1,2030
3551776101002	**1520**	500	50	17,3	1,3	9,4	654	352	1,2133
3551776101003	**1780**	500	50	20,2	1,5	11,0	741	397	1,2233

Art. Nr. are referred to WHITE R01 color version.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n