

LAURA

POLISHED STAINLESS STEEL

 WARRANTY 10 YEARS



MATERIAL:

- Ø 30 mm vertical collectors in polished stainless steel.
- Ø 25 mm horizontal elements in polished stainless steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

CERTIFICATES



FEATURES

P. max: 8 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/2" G

AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Electric

AVAILABLE ACCESSORIES



Kristal valve angled with
thermostatic option
chromed




Kristal valve corner Right
or Left with thermostatic
option chromed



Thermostatic head
Kristal TC chromed

Complete list, codes and details of the ACCESSORIES

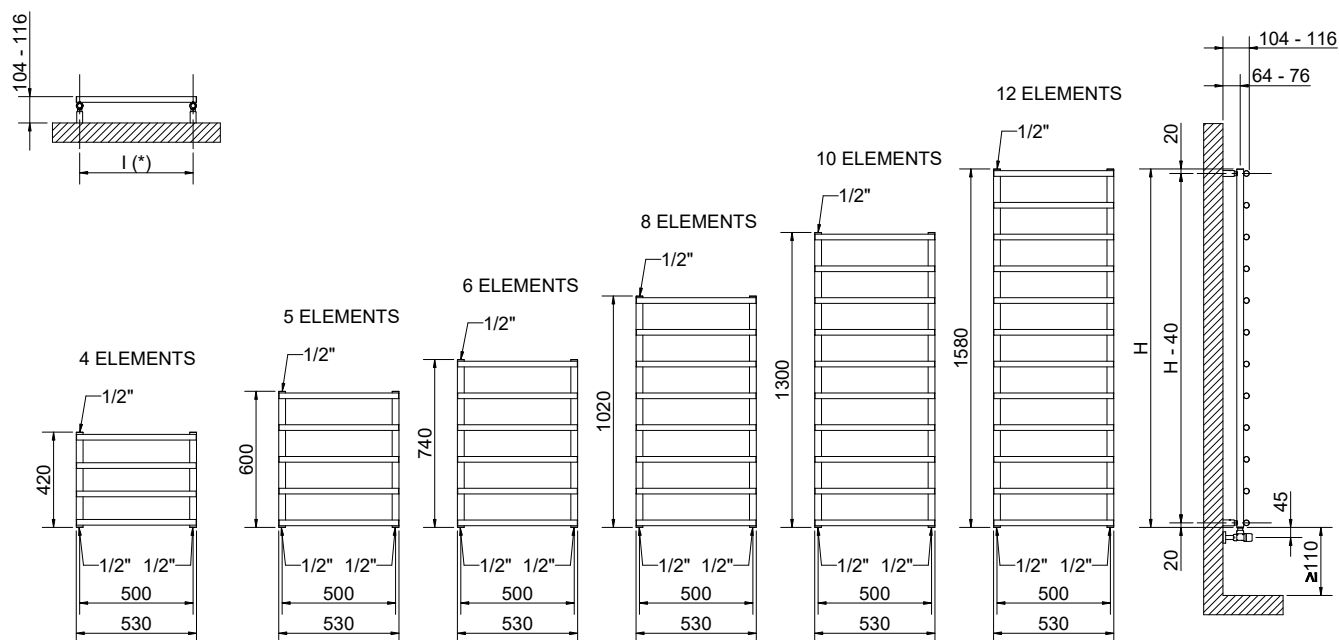

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

LAURA POLISHED STAINLESS STEEL

Height	Width	Pipe Centres	Art. nr.	Dry Weight	Surface	Water content	Thermal output		
							Δt 50°C	Δt 30°C	Exponent
[mm]	L [mm]	l [mm]		[Kg]	[m²]	[lt]	[Watt]	[Watt]	n
420	530	500	3551570400001	2,57	0,25	1,32	112	63	1,1405
600	530	500	3551570400002	3,36	0,32	1,74	146	81	1,1542
740	530	500	3551570400003	4,03	0,39	2,11	173	95	1,1648
1020	530	500	3551570400004	5,41	0,53	2,86	228	124	1,1861
1300	530	500	3551570400005	6,80	0,66	3,60	288	158	1,1765
1580	530	500	3551570400006	8,18	0,80	4,34	354	193	1,1829

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$