

LAURA

SATIN STAINLESS STEEL

 WARRANTY 10 YEARS



MATERIAL:

- Ø 30 mm vertical collectors in satin stainless steel.
- Ø 25 mm horizontal elements in satin stainless steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

CERTIFICATES



FEATURES

P. max: 8 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/2" G

AVAILABLE FUNCTIONS

☒ Hot water

AVAILABLE ACCESSORIES



Kristal valve angled with
thermostatic option satin




Kristal valve corner Right
or Left thermostatic option
satin



Thermostatic head
Kristal TC satin

Complete list, codes and details of the ACCESSORIES

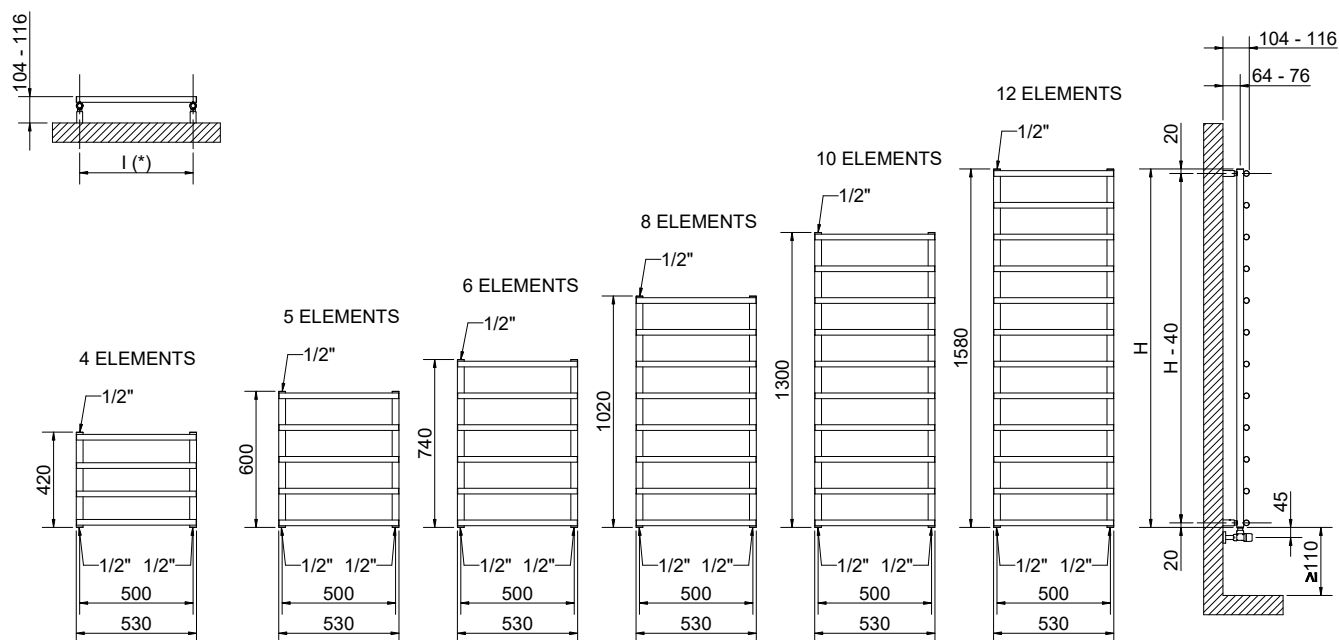

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

LAURA SATIN STAINLESS STEEL

Height	Width	Pipe Centres	Art. nr.	Dry Weight	Surface	Water content	Thermal output		
							Δt 50°C	Δt 30°C	Exponent
[mm]	L [mm]	l [mm]		[Kg]	[m²]	[lt]	[Watt]	[Watt]	n
420	530	500	3551570450001	2,57	0,25	1,32	121	68	1,1605
600	530	500	3551570450002	3,36	0,32	1,74	158	88	1,1742
740	530	500	3551570450003	4,03	0,39	2,11	187	103	1,1855
1020	530	500	3551570450004	5,41	0,53	2,86	247	134	1,2062
1300	530	500	3551570450005	6,80	0,66	3,60	312	171	1,1966
1580	530	500	3551570450006	8,18	0,80	4,34	383	209	1,2031

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$