

LUCY 18

✓ WARRANTY 5 YEARS



Color: RAL 7030 - R22 Grigio pietra

FEATURES

P. max: 8 bar	T. max: 110°C
Functioning: hot water	Connections: n° 2 x 1/2" G - 1 x 1/2" G

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- Ø 18 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart.

CERTIFICATES



AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Electric
- ☒ Dual energy

AVAILABLE ACCESSORIES



Kristal valve Total Color, angled with thermostatic option, colored




Kit 2 colored hooks










Towel bar in painted mild steel

Complete list, codes and details of the ACCESSORIES



Detail of the 50 mm pipe-centres version.

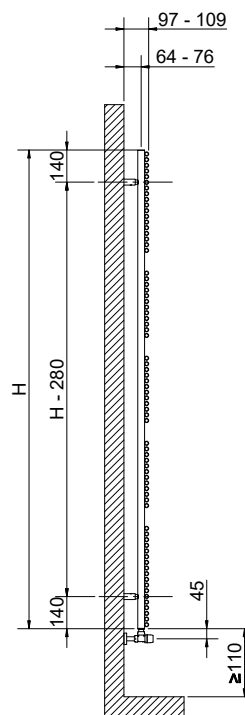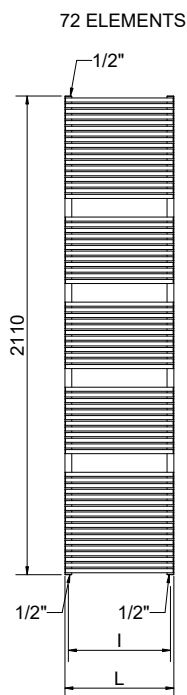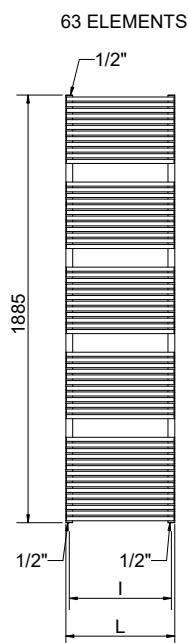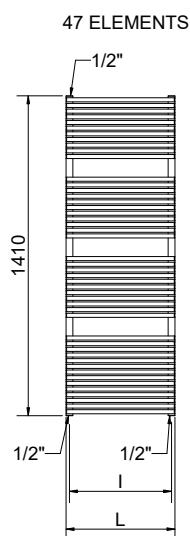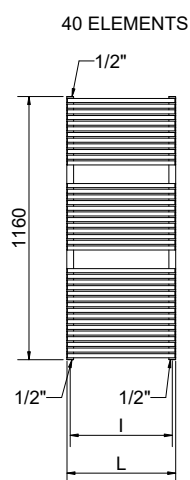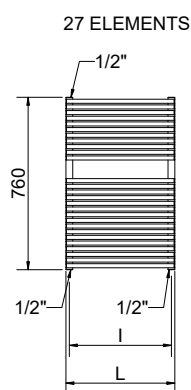

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

LUCY 18

				PIPE CENTRES 50 mm		Thermal output					
Height	Width	Pipe Centres	Art. nr.	Art. nr.		Dry Weight	Surface	Water content	Δt 50°C	Δt 30°C	Dual energy kit
[mm]	L [mm]	I [mm]	R01 White	R01 White		[Kg]	[m²]	[lt]	[Watt]	[Watt]	n [Watt]
760	430	400	3551406100300	3551406100320		6,7	0,75	2,9	436	238	1,1839
	480	450	3551406100304	3551406100324		8,0	0,88	3,3	489	268	1,1780
1160	430	400	3551406100301	3551406100321		11,0	1,19	4,6	631	341	1,2071
	480	450	3551406100305	3551406100325		12,0	1,30	4,9	705	383	1,1960
	530	500	3551406100308	3551406100328		13,0	1,42	5,3	779	425	1,1852
	580	550	3551406100312	3551406100332		13,9	1,53	5,7	852	468	1,1743
1410	430	400	3551406100302	3551406100322		13,0	1,40	5,4	753	407	1,2065
	480	450	3551406100306	3551406100326		14,2	1,54	5,9	838	455	1,1971
	530	500	3551406100309	3551406100329		15,3	1,67	6,4	923	503	1,1876
	580	550	3551406100313	3551406100333		16,5	1,81	6,2	1008	552	1,1782
1885	430	400	3551406100303	3551406100323		17,5	1,87	7,3	986	533	1,2054
	480	450	3551406100307	3551406100327		19,1	2,07	7,9	1090	591	1,1988
	530	500	3551406100310	3551406100330		20,5	2,24	8,5	1194	649	1,1922
	580	550	3551406100314	3551406100334		22,2	2,44	9,1	1298	708	1,1856
2110	530	500	3551406100311	3551406100331		23,4	2,56	9,7	1322	722	1,1853
	580	550	3551406100315	3551406100335		25,2	2,76	10,3	1438	788	1,1779
	730	700	3551406100316	3551406100336		30,7	3,38	12,5	1768	980	1,1558
											1200

The codes shown in the table refer to the R01 White color models

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$