

LUCY 25

WARRANTY 5 YEARS



Color: F25 Quartz dust

FEATURES

P. max: 8 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/2" G

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- Ø 25 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart.

CERTIFICATES



AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Dual energy

AVAILABLE ACCESSORIES



Kristal valve Total Color, angled with thermostatic option, colored




Total Color, Kristal valve, angled pipe centres 50 mm Right or Left with thermostatic option, colored










Thermostatic head Kristal TC fully colored

Complete list, codes and details of the ACCESSORIES



Detail of the 50 mm pipe-centres version.

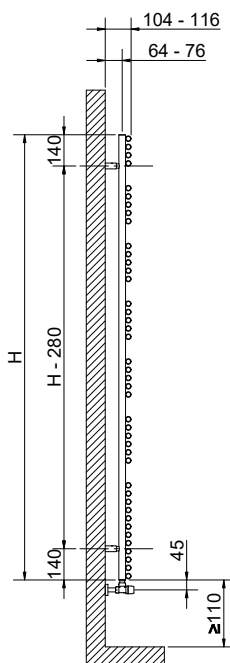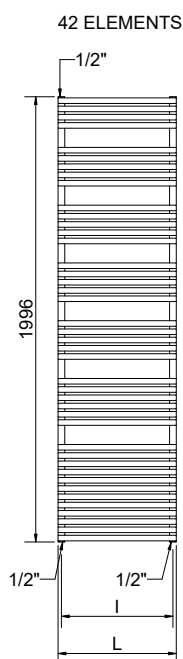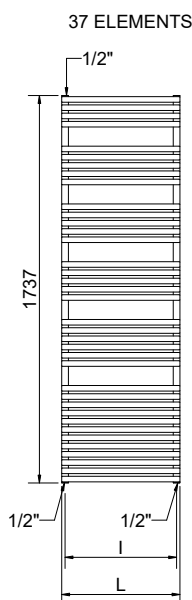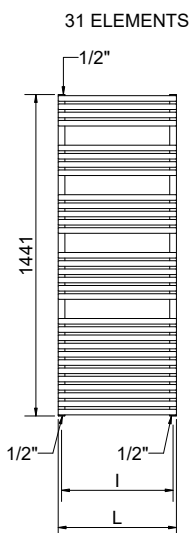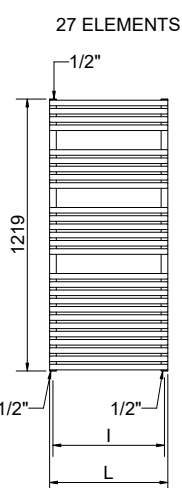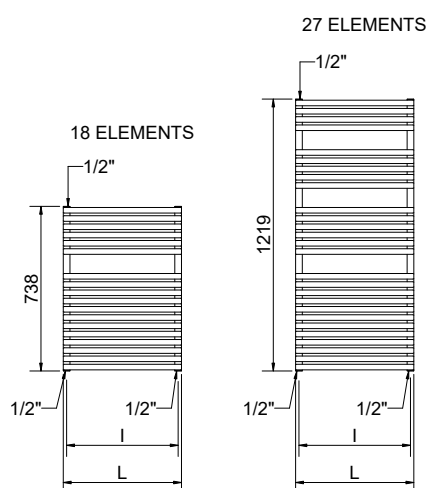

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

LUCY 25

Height	Width	Pipe Centres	Art. nr.	PIPE CENTRES 50 mm		Thermal output					
				Art. nr.	Art. nr.	Dry Weight	Surface	Water content	Δt 50°C	Δt 30°C	Dual energy kit
[mm]	L [mm]	I [mm]	R01 White	R01 White		[Kg]	[m²]	[lt]	[Watt]	[Watt]	n
738	430	400	3551406100340	3551406100360		5,8	0,747	4,1	384	210	1,1834
	480	450	3551406100344	3551406100364		6,4	0,818	4,5	430	235	1,1806
1219	430	400	3551406100341	3551406100361		9,0	1,142	6,3	589	321	1,1879
	480	450	3551406100345	3551406100365		9,8	1,248	6,8	656	358	1,1873
	530	500	3551406100348	3551406100368		10,6	1,354	7,4	724	395	1,1867
	580	550	3551406100352	3551406100372		11,4	1,460	8,0	791	431	1,1861
1441	430	400	3551406100342	3551406100362		10,4	1,319	7,3	684	371	1,1993
	480	450	3551406100346	3551406100366		11,3	1,440	7,9	761	413	1,1942
	530	500	3551406100349	3551406100369		12,2	1,562	8,6	838	456	1,1891
	580	550	3551406100353	3551406100373		13,1	1,684	9,2	915	500	1,184
1737	430	400	3551406100343	3551406100363		12,4	1,577	8,7	813	438	1,2123
	480	450	3551406100347	3551406100367		13,5	1,722	9,5	903	488	1,206
	530	500	3551406100350	3551406100370		14,6	1,868	10,2	992	538	1,1997
	580	550	3551406100354	3551406100374		15,7	2,013	11,0	1082	588	1,1934
1996	530	500	3551406100351	3551406100371		16,6	2,125	11,6	1131	610	1,2091
	580	550	3551406100355	3551406100375		17,8	2,289	12,5	1231	666	1,2017
	730	700	3551406100356	3551406100376		21,6	2,784	15,1	1532	839	1,1798
											1200

The codes shown in the table refer to the R01 White color models

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$