

# NAIKE ST

 **WARRANTY 5 YEARS**



**NEW**



Color: T24 Nabuk

## FEATURES

P. max: **8 bar**

T. max: **110°C**

Functioning: **hot water**

Connections: **n° 2 x 1/2" G - 1 x 1/2" G**

## MATERIAL:

- 30x30 mm collectors in painted mild steel.
- 15x20 mm horizontal heating elements in painted mild steel.

## FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.  
The fixing kit is compliant with VDI 6036 norm, class 4.

## PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.  
User notice included.

## PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

## COLORS:

See color chart.

## CERTIFICATES



## AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Electric
- ☒ Dual energy

## AVAILABLE ACCESSORIES



**Kristal valve Total Color, angled with thermostatic option, colored**




**Total Color, Kristal valve, angled pipe centres 50 mm Right or Left with thermostatic option, colored**








**Thermostatic head Kristal TC fully colored**

*Complete list, codes and details of the ACCESSORIES*



Detail of the 50 mm pipe-centres version.

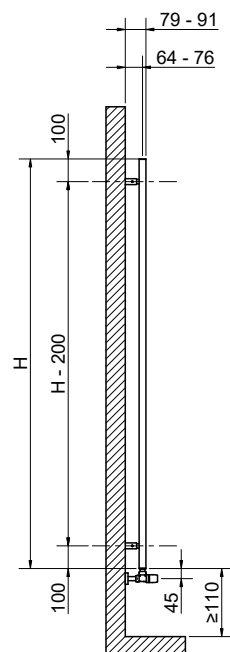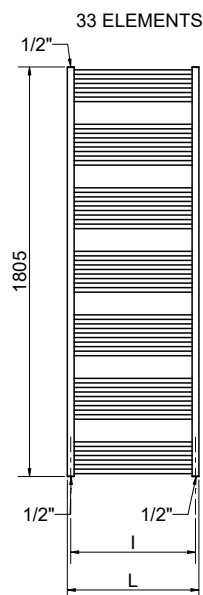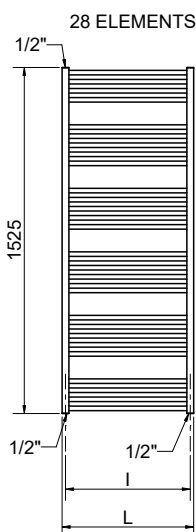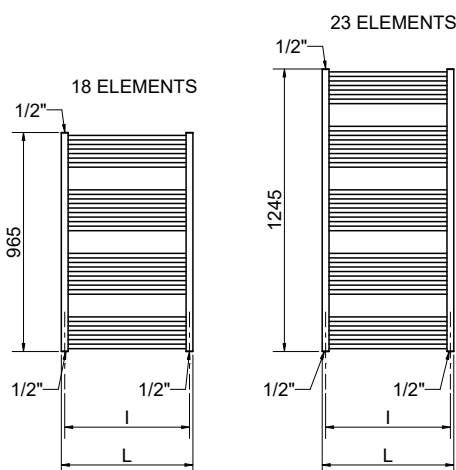

(\*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

## NAIKE ST

| Height | Width  | Pipe Centres | Art. nr.      | PIPE CENTRES 50 mm |               | Thermal output |         |               |                 |                 |                 |
|--------|--------|--------------|---------------|--------------------|---------------|----------------|---------|---------------|-----------------|-----------------|-----------------|
|        |        |              |               | Art. nr.           | Art. nr.      | Dry Weight     | Surface | Water content | $\Delta t$ 50°C | $\Delta t$ 30°C | Dual energy kit |
| [mm]   | L [mm] | l [mm]       | R01 White     | R01 White          | R01 White     | [Kg]           | [m²]    | [lit]         | [Watt]          | [Watt]          | n [Watt]        |
| 965    | 430    | 400          | 3551826102116 | 3551826102136      | 3551826102136 | 8,2            | 0,76    | 3,8           | <b>376</b>      | 200             | 1,2372          |
|        | 480    | 450          | 3551826102117 | 3551826102137      | 3551826102137 | 8,8            | 0,81    | 4,1           | <b>409</b>      | 218             | 1,234           |
|        | 530    | 500          | 3551826102118 | 3551826102138      | 3551826102138 | 9,4            | 0,87    | 4,4           | <b>443</b>      | 236             | 1,2313          |
|        | 580    | 550          | 3551826102119 | 3551826102139      | 3551826102139 | 10             | 0,92    | 4,7           | <b>477</b>      | 254             | 1,229           |
|        | 630    | 600          | 3551826102120 | 3551826102140      | 3551826102140 | 10,6           | 0,98    | 5             | <b>510</b>      | 273             | 1,2285          |
| 1245   | 430    | 400          | 3551826102121 | 3551826102141      | 3551826102141 | 10,3           | 0,87    | 4,2           | <b>477</b>      | 253             | 1,2414          |
|        | 480    | 450          | 3551826102122 | 3551826102142      | 3551826102142 | 11,1           | 0,94    | 4,5           | <b>520</b>      | 276             | 1,2392          |
|        | 530    | 500          | 3551826102123 | 3551826102143      | 3551826102143 | 11,9           | 1,01    | 4,8           | <b>563</b>      | 299             | 1,2373          |
|        | 580    | 550          | 3551826102124 | 3551826102144      | 3551826102144 | 12,6           | 1,09    | 5,1           | <b>606</b>      | 322             | 1,2357          |
|        | 630    | 600          | 3551826102125 | 3551826102145      | 3551826102145 | 13,3           | 1,16    | 5,4           | <b>649</b>      | 345             | 1,2354          |
| 1525   | 430    | 400          | 3551826102126 | 3551826102146      | 3551826102146 | 12,7           | 0,99    | 4,6           | <b>579</b>      | 307             | 1,2456          |
|        | 480    | 450          | 3551826102127 | 3551826102147      | 3551826102147 | 13,7           | 1,08    | 4,9           | <b>632</b>      | 335             | 1,2444          |
|        | 530    | 500          | 3551826102128 | 3551826102148      | 3551826102148 | 14,6           | 1,16    | 5,2           | <b>685</b>      | 363             | 1,2433          |
|        | 580    | 550          | 3551826102129 | 3551826102149      | 3551826102149 | 15,6           | 1,25    | 5,5           | <b>738</b>      | 391             | 1,2424          |
|        | 630    | 600          | 3551826102130 | 3551826102150      | 3551826102150 | 16,4           | 1,33    | 5,8           | <b>790</b>      | 419             | 1,2408          |
| 1805   | 430    | 400          | 3551826102131 | 3551826102151      | 3551826102151 | 14,8           | 1,11    | 5             | <b>684</b>      | 361             | 1,2498          |
|        | 480    | 450          | 3551826102132 | 3551826102152      | 3551826102152 | 15,9           | 1,21    | 5,3           | <b>747</b>      | 395             | 1,2496          |
|        | 530    | 500          | 3551826102133 | 3551826102153      | 3551826102153 | 17             | 1,31    | 5,6           | <b>810</b>      | 428             | 1,2493          |
|        | 580    | 550          | 3551826102134 | 3551826102154      | 3551826102154 | 18,1           | 1,46    | 5,9           | <b>874</b>      | 462             | 1,2492          |
|        | 630    | 600          | 3551826102135 | 3551826102155      | 3551826102155 | 19,1           | 1,51    | 6,2           | <b>937</b>      | 495             | 1,2488          |

The codes shown in the table refer to the R01 White color models

For output at different  $\Delta T$ , please refer to the following formula:  $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$