

ROBERTA

CHROMED ELECTRIC

CE **EUROPEAN**
WARRANTY



Detail of the version with
Thermostat PLUS

ELECTRICAL ONLY:

- ☒ With **manual on/off**
- ☒ With digital thermostat

Material:

- Vertical collectors in mild steel semi oval 30x40 mm.
- Horizontal heating elements in mild steel \varnothing 22 mm.
- Heat transfer fluid.

Fixing kit:

The fixing kit is in compliance with norm VDI 6036, that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



OPTIONAL



REMOTE CONTROL OF
PLUS DIGITAL CHRONO-
THERMOSTAT

Remote control of PLUS digital
chrono-thermostat functioning

ACCESSORIES



KIT 2 HOOKS
CHROMED

Art. nr. 5991990310303



TOWEL BAR
CHROMED
Width= 370 mm

Art. nr. 5991990310302

Applicable only for width \geq 450 mm

Electrical resistors: **Class 1**

Minimum ingress protection: **IP 44 (ECO or PLUS digital thermostat)**
IP 54 (manual on/off)

Wire lenght: **1200 mm with Schuko plug (ECO or PLUS digital thermostat)**
1100 mm with Schuko plug (manual on/off)

Power supply: **230Vac 50/60Hz**

Seasonal energy efficiency η_s : **38% with ECO or PLUS digital thermostat**

Packing:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.



Finishing:

Chrome (PLATED IN ITALY).

Electrical resistors:

Electrical resistors:


- White digital thermostat - Class 1 - IP44.
- 6 functioning modes: comfort, night, antifreeze, chrono, 2H timer and standby.
- With manual on/off manuale on/off (H 700 x L 400 e H 700 x L 500) - Class 1 - IP54.

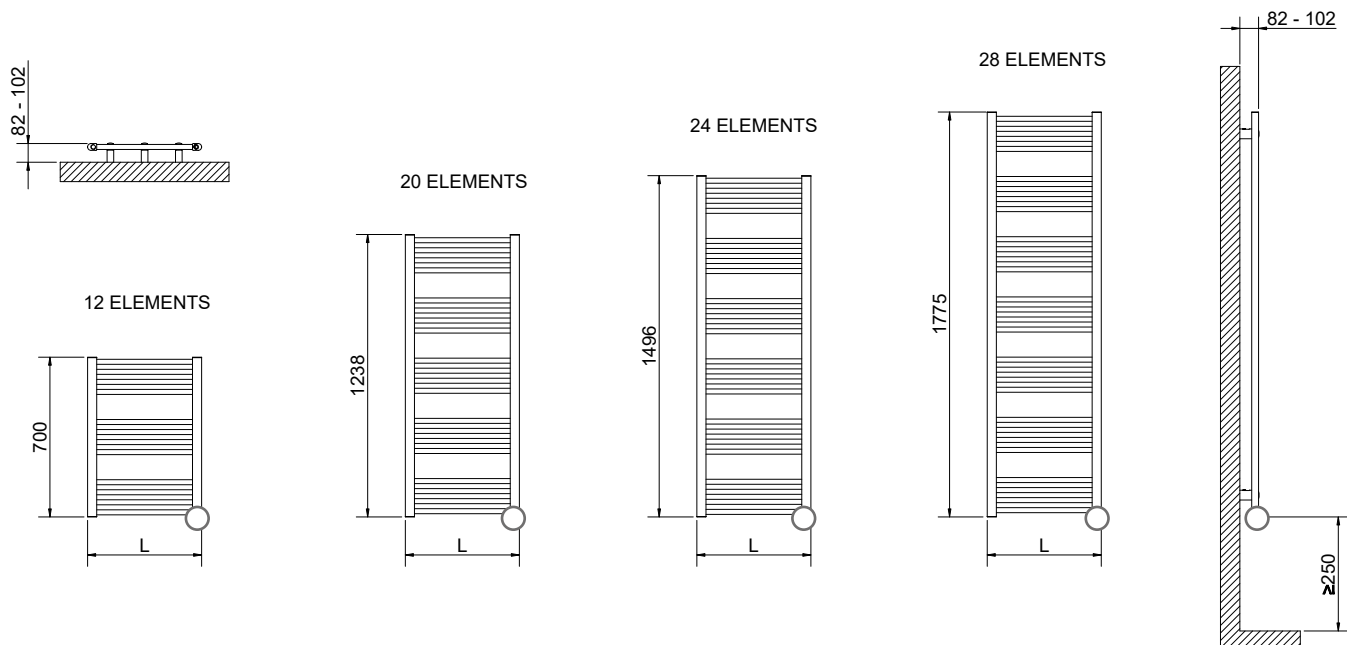

The general footprint has to be calculated considering the dimension of the electrical resistance cap.

ROBERTA CHROMED ELECTRIC - WITH MANUAL ON/OFF


Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
700	400	3581656110000	150	6
	500	3581656110001	150	8



The general footprint has to be calculated considering the thermostat height.

ROBERTA CHROMED ELECTRIC - WITH ECO DIGITAL THERMOSTAT

Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
1238	400	3581656110002	300	11
	450	3581656110003	400	12
	500	3581656110004	400	13
1496	400	3581656110005	400	14
	500	3581656110006	500	15
1775	500	3581656110007	600	18




The general footprint has to be calculated considering the thermostat height.

ROBERTA CHROMED ELECTRIC - WITH PLUS DIGITAL THERMOSTAT

Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
1238	400	3581656110010	300	11
	450	3581656110011	400	12
	500	3581656110012	400	13
1496	400	3581656110013	400	14
	500	3581656110014	500	15
1775	500	3581656110015	600	18

HOW TO PLACE ELECTRIC RADIATORS

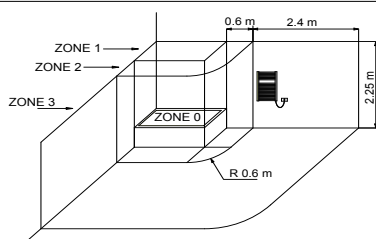

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%. Each of the ErP electric radiator is equipped with at least electronic temperature control, window opening detection and weekly programmer.