



YARA

PATENTED



5 YEARS WARRANTY

MATERIAL:

Vertical collector in painted mild steel 90x30 mm.
Horizontal heating elements in painted mild steel Ø 18 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLORS:

Radiators and accessories: standard white R01 color.
For other colors see color chart.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C


Available for central heating systems

Connections: n° 2 x G 1/2" - n° 2 x G 1/2"

AWARD



REVERSIBLE



ACCESSORIES



Elegant square manual valve kit painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552



Elegant square with thermostatic head valve kit, painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310539

Multilayer connection Ø 16 x2
Art. Nr. 5991990310538



Pipe covering kit for Pipe Centres 50 mm polished valves

Art. Nr. 5103000000057



Tinta valve pipe centres 50 mm with thermostatic head - right - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311243









Multilayer connection Ø 16 x2
Art. Nr. 5991990311242



Tinta valve pipe centres 50 mm with thermostatic head left - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311245

Multilayer connection Ø 16 x2
Art. Nr. 5991990311244

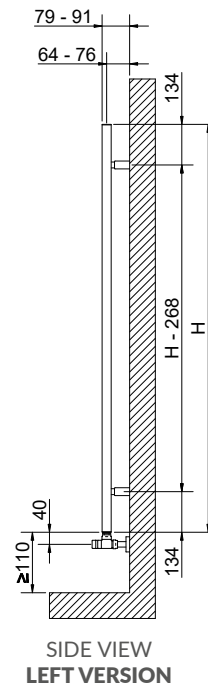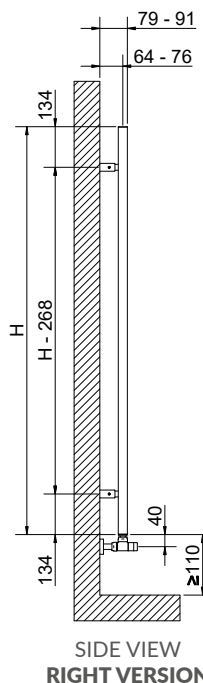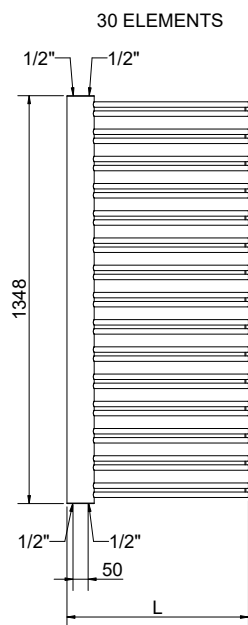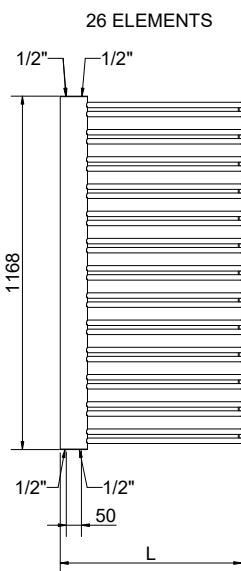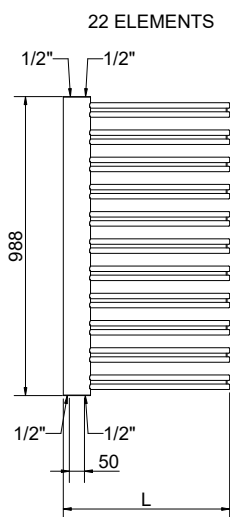

YARA

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	I [mm]	[Kg]	[m²]	[lt]	$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3551436101001	988	500	50	16,4	0,8	3,8	465	246	1,2466
3551436101002	1168	500	50	19,4	0,9	4,4	557	292	1,2646
3551436101003	1348	500	50	22,4	1,0	5,1	613	319	1,2786

Art. Nr. are referred to WHITE R01 color version.

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t 50^{\circ}\text{C} \times (\text{desired } \Delta t / 50)^n$