

Kod	Wydajność cieplna 55/45/20°C (W)	Wydajność cieplna 75/65/20°C (W)	Waga wyrobu wraz z kompletacją i opakowaniem (kg)	Wewnętrzna objętość wyrobu (dm³)	Zalecana moc grzałki (W)
**207	204	412	6,60	2,33	300
**209	245	504	8,60	2,78	300
**212	199	408	6,60	2,18	300
**213	232	476	7,80	2,62	300
**214	286	588	9,80	3,13	300
**215	327	672	11,80	3,48	600
**216	388	800	14,00	3,51	600
**217	442	910	15,80	3,86	600



Wodny





Hybrydowy
(wodno-
elektryczny)




Elektryczny


Oznaczenie punktów podłączenia do instalacji:



UWAGA!
Grzałkę elektryczną montować
wyłącznie w dolnym otworze kolektora.
Grzejnik eksploatować wyłącznie
w położeniu pionowym - grzałką w dół.

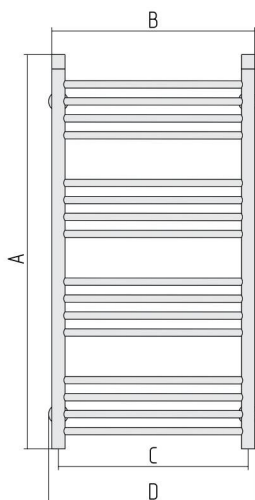

CE EN 442

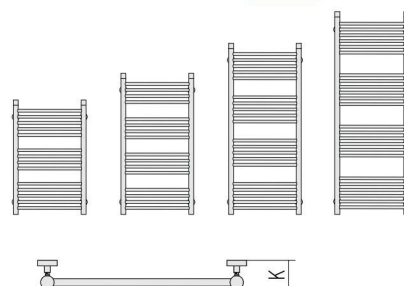

Kod	A	B	C	D	E	F	G	X	P	K
**207	958	432	400	450	54-70	80	762	116	32	69-85
**209	1158	432	400	450	54-70	80	962	116	32	69-85
**212	758	532	500	550	54-70	80	562	116	32	69-85
**213	958	532	500	550	54-70	80	762	116	32	69-85
**214	1158	532	500	550	54-70	80	962	116	32	69-85
**215	1158	632	600	650	54-70	80	962	116	32	69-85
**216	1458	532	500	550	54-70	80	1262	116	32	69-85
**217	1458	632	600	650	54-70	80	1262	116	32	69-85

Gama kolorów



50XXX
Stal polerowana



53XXX
Złoty (PVD)

Kolor Złoty dostępny
w wybranych wymiarach