

KELLY 5010

 WARRANTY 5 YEARS



Color: F25 Quartz dust


FEATURES

P. max: 5 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 2 x 1/2" G



MATERIAL:

- Ø 38 mm collectors in painted mild steel.
- 50x10 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart.

CERTIFICATES



AVAILABLE FUNCTIONS

- | | |
|---|--|
| ☒ Hot water | ☒ Blower |
| ☒ Electric | ☒ Blower dual energy |
| ☒ Dual energy | |

TIPS



The option with central connection and collectors on the right is ideal for dual energy.

AVAILABLE ACCESSORIES



Total Color, Kristal valve, angled pipe centres 50 mm Right or Left with thermostatic option, colored




Thermostatic head Kristal TC fully colored




Thermostatic head Kristal TC chromed







Complete list, codes and details of the ACCESSORIES



Detail of central connection
(COLLECTORS ON THE LEFT)



Detail of central connection
(COLLECTORS ON THE RIGHT)

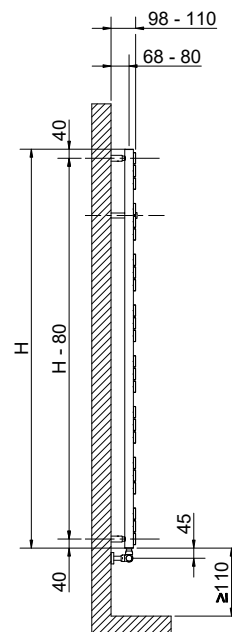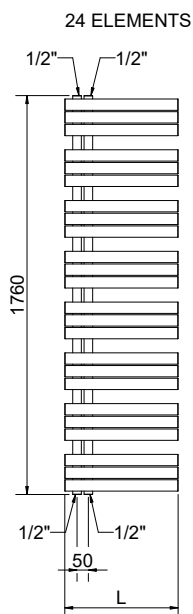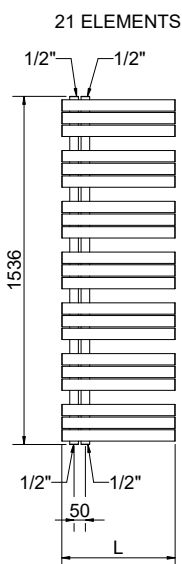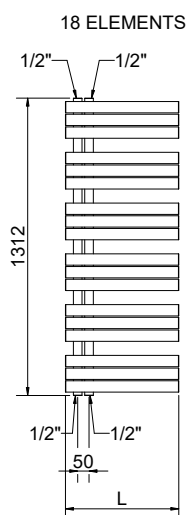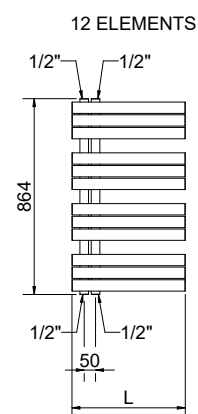



Quotes for Kristal valves

KELLY 5010


Thermal output

Height	Width	Art. nr.	Surface	Water content	Δt 50°C	Δt 30°C	Exp.	Dual energy kit
[mm]	L [mm]	R01 White	[m²]	[lt]	[Watt]	[Watt]	n	[Watt]
864	500	3551726100025	0,87	3,9	381	204	1,2243	400
	600	3551726100029	1,01	4,3	443	234	1,2536	400
1312	500	3551726100026	1,31	5,8	563	300	1,2351	500
	600	3551726100030	1,51	6,5	637	336	1,2533	600
1536	500	3551726100027	1,53	6,8	652	341	1,2695	600
	600	3551726100031	1,77	7,6	742	388	1,2696	700
1760	500	3551726100028	1,75	7,8	728	378	1,2837	700
	600	3551726100032	2,02	8,7	875	455	1,2781	900




KELLY 5010 CENTRAL CONNECTION (COLLECTORS ON THE RIGHT)

Height	Width	Art. nr.
[mm]	L [mm]	R01 White
864	500	3551726100041
	600	3551726100045
1312	500	3551726100042
	600	3551726100046
1536	500	3551726100043
	600	3551726100047
1760	500	3551726100044
	600	3551726100048



KELLY 5010 CENTRAL CONNECTION (COLLECTORS ON THE LEFT)

Height	Width	Art. nr.
[mm]	L [mm]	R01 White
864	500	3551726100033
	600	3551726100037
1312	500	3551726100034
	600	3551726100038
1536	500	3551726100035
	600	3551726100039
1760	500	3551726100036
	600	3551726100040



The codes shown in the table refer to the R01 White color models

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$