



MOVIE®

design **Mariano Moroni**



5 YEARS WARRANTY

MATERIAL:

Super slim heating body in painted mild steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.

The fixing kit is compliant with VDI 6036 norm, class 4.

VALVE KIT INCLUDES:

Valves

Fittings for copper pipe (Ø 12/14/15)

Fittings for multilayer pipe (Ø 16 x2)

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLORS:

Radiators and accessories: standard white R01 color.

For other colors see color chart.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 2 x G 1/2"

AWARD

COMFORT & DESIGN






NOMINÉ

ACCESSORIES




**Liquid thermostatic head
- polished**


Art. Nr. 5035270710002

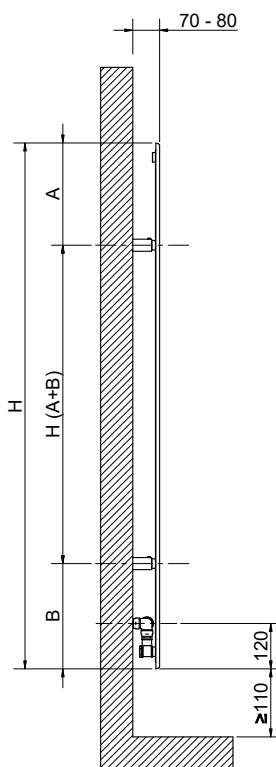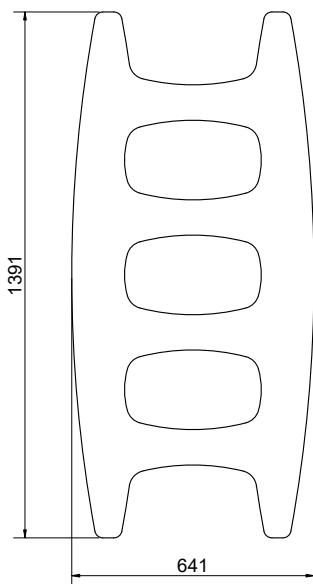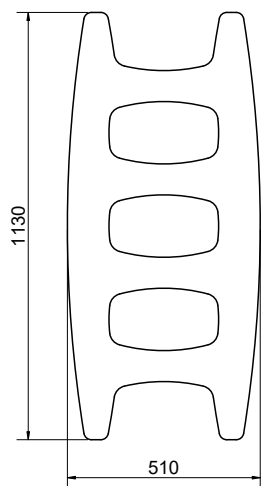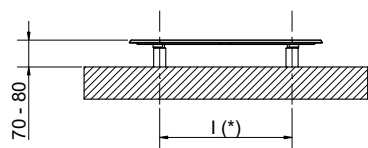

THERMOSTATIC HEAD
positioning (optional)



CONNECTION detail



H [mm]	A [mm]	B [mm]	L (*) [mm]
1130	240	235	350
1392	270	280	350

MOVIE®

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	I [mm]	[Kg]	[m²]	[lt]	Δt = 50°C	Δt = 30°C	
3540806100002	1130	510	360 ÷ 400	15	0,6	1,1	385	209	1,1958
3540806100001	1392	642	450	18	0,92	1,3	559	300	1,2202

Art. Nr. are referred to WHITE R01 color version.

The Art. Nr. is inclusive of **VALVE AND HOLDER**.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n