



Color: RAL 9010 - R01 White

FEATURES

P. max: 5 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/2" G

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- 50x25 mm horizontal heating elements, elliptic shape, in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart.

CERTIFICATES



AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Dual energy

AVAILABLE ACCESSORIES



Kristal valve Total Color, angled with thermostatic option, colored




Kristal valve Total Color corner Right or Left with thermostatic option, colored




Thermostatic head Kristal TC fully colored

Complete list, codes and details of the ACCESSORIES



Detail of the 50 mm pipe-centres version.

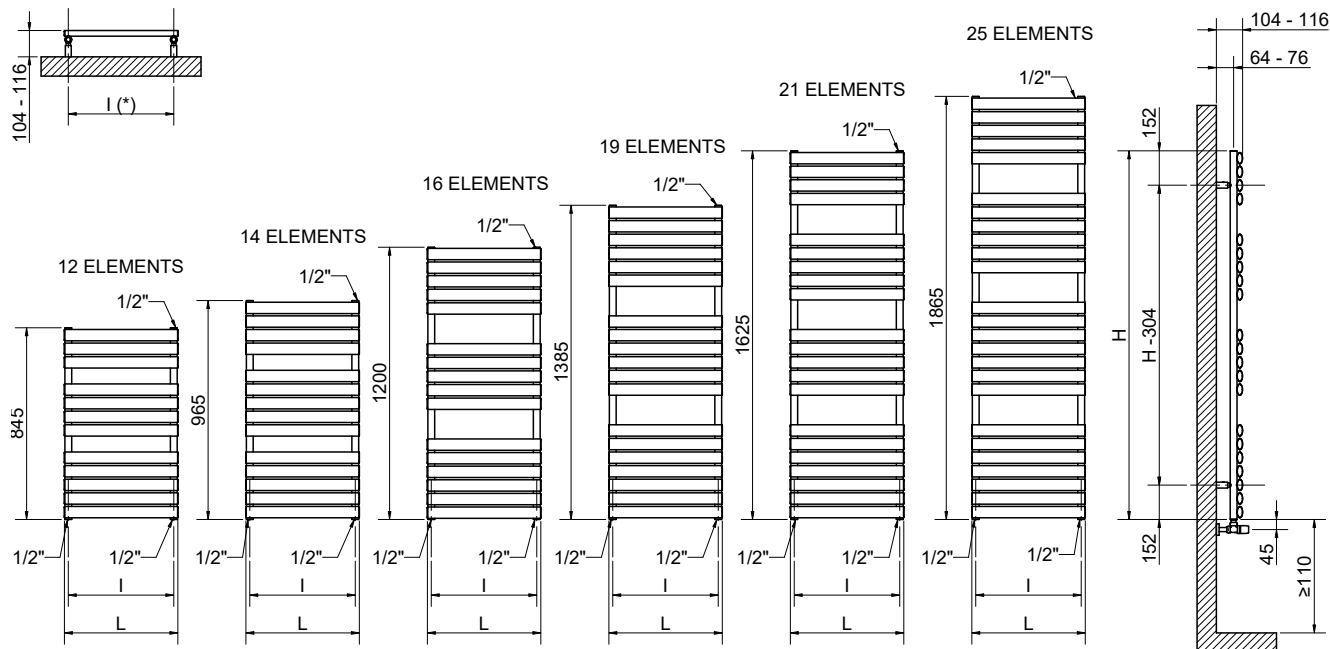

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

SAMIRA

PIPE CENTRES 50 mm

Thermal output

Height	Width	Pipe Centres	Art. nr.	Art. nr.	Dry Weight	Surface	Water content	Δt 50°C	Δt 30°C	Exp.	Dual energy kit
[mm]	L [mm]	l [mm]	R01 White	R01 White	[Kg]	[m²]	[lt]	[Watt]	[Watt]	n	[Watt]
845	400	365	3551626102031	3551626102049	7,62	0,74	5,64	371	200	1,2079	300
	500	465	3551626102032	3551626102050	8,95	0,88	6,82	456	248	1,1938	400
	600	565	3551626102033	3551626102051	10,28	1,03	8,00	541	296	1,1798	500
965	400	365	3551626102034	3551626102052	8,83	0,86	6,56	414	223	1,2070	400
	500	465	3551626102035	3551626102053	10,38	1,03	7,93	507	275	1,1944	500
	600	565	3551626102036	3551626102054	11,93	1,19	9,31	600	328	1,1818	600
1200	400	365	3551626102037	3551626102055	10,29	1,00	7,61	501	271	1,2051	500
	500	465	3551626102038	3551626102056	12,06	1,19	9,18	609	331	1,1954	600
	600	565	3551626102039	3551626102057	13,83	1,38	10,75	718	392	1,1856	700
1385	400	365	3551626102040	3551626102058	11,95	1,17	8,99	571	308	1,2081	600
	500	465	3551626102041	3551626102059	14,22	1,41	10,85	693	378	1,1889	700
	600	565	3551626102042	3551626102060	16,09	1,61	12,72	815	444	1,1897	700
1625	400	365	3551626102043	3551626102061	13,40	1,31	10,04	667	359	1,2119	700
	500	465	3551626102044	3551626102062	15,69	1,55	12,10	808	437	1,2034	700
	600	565	3551626102045	3551626102063	17,98	1,79	14,17	949	536	1,1195	900
1865	400	365	3551626102046	3551626102064	17,1	1,56	12	769	409	1,2368	700
	500	465	3551626102047	3551626102065	20,1	1,86	14,4	925	498	1,2115	900
	600	565	3551626102048	3551626102066	23	2,15	16,9	1081	590	1,1862	1000

The codes shown in the table refer to the R01 White color models

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$

ARDESIA®

TOWEL RAILS

ELECTRIC & BLOWER

STAINLESS STEEL

LIVING

ACCESSORIES
TECHNICAL SUPPORT